


Gasoline Product Offering



KOHLER® Engines

KOHLER® Engines



COMMAND PRO® EFI

Blower
Concrete Saw
Concrete Trowel
Curber
Floor Buffer
Generator
Light Tower
Zero-Turn Mower
Pump
Riding Mower
Stump Grinder
Welder
Wide-Area Walk-Behind
Wood Chipper



COMMAND PRO TWIN & SINGLE CYLINDER

Blower
Concrete Saw
Concrete Trowel
Curber
Floor Buffer
Generator
Light Tower
Zero-Turn Mower*
Pump
Riding Mower
Stump Grinder
Welder
Wide-Area Walk-Behind*
Wood Chipper

*Twin Application Only




AEGIS®

Blower
Concrete Saw
Concrete Trowel
Curber
Floor Buffer
Generator
Light Tower
Zero-Turn Mower
Pump
Riding Mower
Stump Grinder
Welder
Wood Chipper



CONFIDANT™

Stand-On Mower
Riding Mower
Zero-Turn Mower



2000/3000 SERIES

Blower
Chipper/Shredder
Edger
Generator
Log Splitter
Pressure Washer
Pump
Tiller
Utility Application



7000 SERIES

Riding Mower
Zero Turn Mower



COURAGE®

Zero-Turn Mower
Riding Mower



XT SERIES

Walk-Behind
Lawn Mower

KOHLER® Engines

EVERY PART, EVERY COMPONENT AND EVERY SYSTEM ON OUR ENGINES IS GUIDED BY KOHLER'S EXCLUSIVE PERFORMANCE ENGINEERING. IT'S YOUR ASSURANCE THAT EVERY ENGINE WE PRODUCE WILL LIVE UP TO AND BUILD UPON THE WORLDWIDE KOHLER REPUTATION FOR EXCELLENCE.

TABLE OF CONTENTS

6	KOHLER® Command PRO® EFI 6-7 ECH630, 650, 730, 749 8-9 ECV630, 650, 730, 749	22	Command PRO EFI Propane 22-23 PCH680, 740 24-25 PCV680, 740	30	KOHLER Command PRO Single Cylinder 30-31 CH260, 270, 395, 440	38	KOHLER Courage® 38-39 SV471, 530, 541, 591, 601
10	KOHLER Command PRO Twin Cylinder 10-11 CH940, 980, 1000 12-13 CV940, 980, 1000 14-15 CH620, 640, 682, 732, 742, 752 16-17 CH620, 640, 680, 730, 740, 750 18-19 CV620, 640, 682, 732, 742, 752 20-21 CV620, 640, 680, 730, 740, 750	26	KOHLER Command PRO LP & NG 26-27 CH730LP, CH740 LP/NG	32	KOHLER Confidant™ 32-33 ZT710, 720, 730, 740	40	KOHLER 2000 Series 40-41 RH255, 265
		28	KOHLER Aegis® 28-29 LH690, 775	34	KOHLER 3000 Series 34-35 SH265, 255	42	KOHLER XT Series 42-43 XT650, 675, 775
				36	KOHLER 7000 Series 36-37 KT715, 725, 730, 735, 740, 745		

KOHLER® Gasoline Engines

GRADE	ENGINE FAMILY	TOP FEATURES	SHAFT	Gross Horsepower Ratings at 3600 rpm (unless otherwise stated) as per SAE J1940																				
				6.50	6.75	7.75	4.0	5.5	6.5	9.5	14.0	15.0	17.0	18.0	19.0	20.0	20.5	21.0	22.0	22.5	23.0	23.5	24.0	25.0
Commercial/ Consumer	Confidant™	Commercial Durability; Larger Air, Oil & Fuel Filters; Optional Cyclonic Air Filter; 2-Yr Commercial, 3-Yr Consumer Warranty	V											•		•			•				•	
	3000 Series	Single-Stage Air Cleaner, Accu-Fill® Fuel Tank, 2-Yr Consumer Warranty	H					•	•															
Consumer	7000 Series	Commercially Designed, Optional PRO Performance Filtration, Pressure Lubrication, 2-Yr Consumer Warranty	V												•		•		•		•	•	•	
	Courage®	Twin Cam Design, Pressure Lubrication, 2-Yr Consumer Warranty	V									•	•	•	•	•								
	2000 Series	Foam Element Air Cleaner, Aluminum Cylinder 2-Yr Consumer Warranty	H					•	•															
	XT Series	Cast-Iron Cylinder Liners, Overhead Valve 2-Yr Consumer Warranty	V	*	*	*																		

* Gross Torque Rating at 2800 rpm


KOHLER®

Command PRO®

Closed-Loop EFI


ECH630, ECH650, ECH730, ECH740, ECH749

MAXIMUM POWER

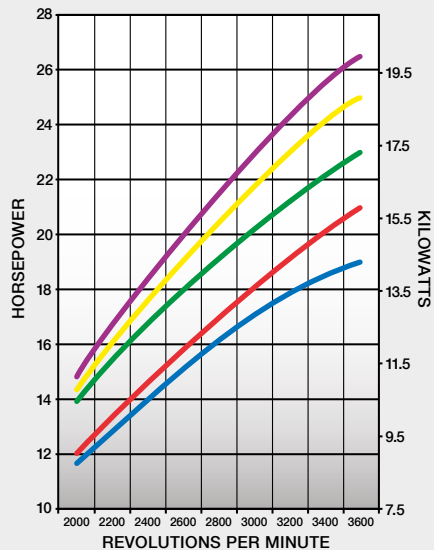

ECH630 ECH650 ECH730
ECH740 ECH749

MAXIMUM TORQUE

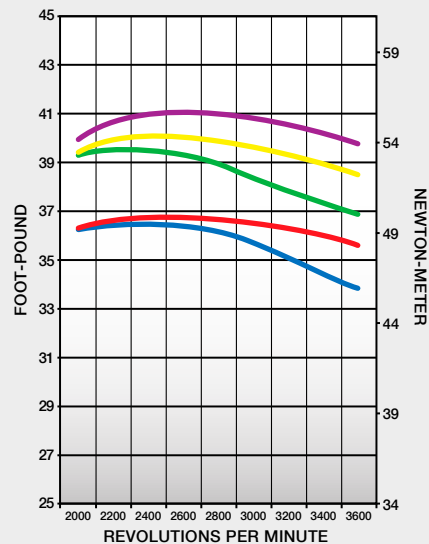

ECH630 ECH650 ECH730
ECH740 ECH749

KOHLER® Command PRO®
Closed-Loop EFI

19-26.5 hp



KOHLER® Command PRO
Closed-Loop EFI 26.5 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:
Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block, electronic fuel injection
Additional Features:
Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters


MODEL		ECH630	ECH650	ECH730	ECH740	ECH749
Gross Power @ 3600	Max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)	26.5 (19.8)
Displacement	cu in (cc)	42 (694)		45 (747)		
Bore	in (mm)	3.2 (80)		3.3 (83)		
Stroke	in (mm)	2.7 (69)				
Peak Torque @ rpm	ft-lb (Nm)	34.2 (46.4) @ 2200 rpm	34.5 (46.8) @ 2600 rpm	38.1 (51.7) @ 2200 rpm	38.8 (52.6) @ 2400 rpm	40.0 (54.2) @ 2600 rpm
Compression Ratio		8.7:1		9.1:1		
Dry Weight	lb (kg)	108 (49)				
Oil Capacity	U.S. qt (L)	2 (1.9)				
Lubrication		Full-pressure lubrication with full-flow filter				
*Dimensions L x W x H	in (mm)	flat air cleaner 14.6 x 18.2 x 18.7 (371 x 462 x 475) heavy-duty air cleaner 14.8 x 18.9 x 24.5 (376 x 480 x 622)				

KOHLER®


Command PRO®

Closed-Loop EFI

ECV630, ECV650, ECV730, ECV740, ECV749

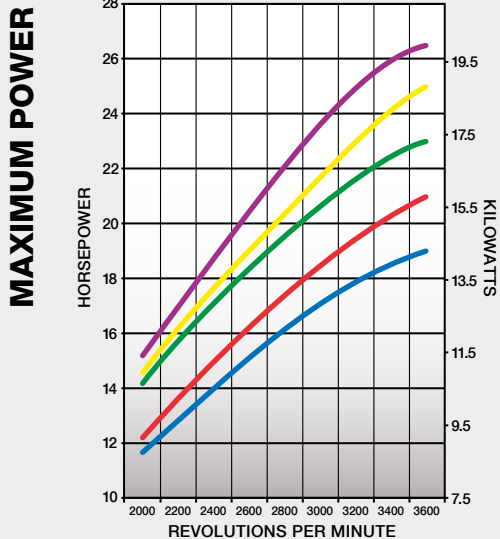

ECV630 ECV650 ECV730
ECV740 ECV749

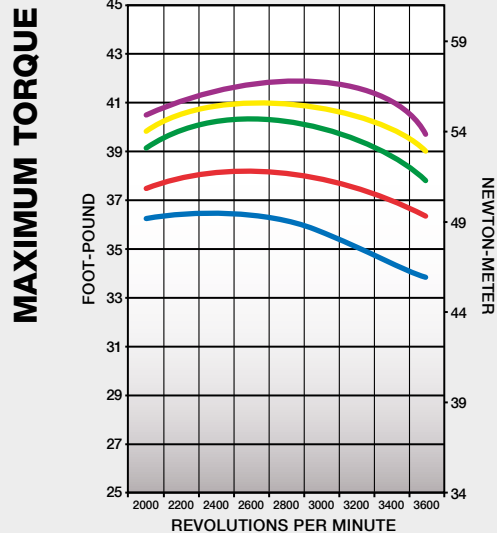

ECV630 ECV650 ECV730
ECV740 ECV749

KOHLER® Command PRO®
Closed-Loop EFI

19-26.5 hp



KOHLER® Command PRO
Closed-Loop EFI 26.5 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 3-Yr Commercial

Engine Type:
Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block, electronic fuel injection

Additional Features:
Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters


MODEL		ECV630	ECV650	ECV730	ECV740	ECV749
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)	26.5 (19.8)
Displacement	cu in (cc)	42 (694)		45 (747)		
Bore	in (mm)	3.2 (80)		3.3 (83)		
Stroke	in (mm)	2.7 (69)				
Peak Torque @ rpm	ft-lb (Nm)	34.2 (46.4) @ 2200 rpm	36.4 (46.8) @ 2600 rpm	39.1 (51.7) @ 2200 rpm	39.9 (52.6) @ 2400 rpm	40.9 (54.2) @ 2600 rpm
Compression Ratio		8.7:1		9.1:1		
Dry Weight	lb (kg)	108 (49)				
Oil Capacity	U.S. qt (L)	2 (1.9)				
Lubrication		Full-pressure lubrication with full-flow filter				
*Dimensions L x W x H	in (mm)	flat air cleaner 17.9 x 18.3 x 14.5 (455 x 465 x 368) heavy-duty air cleaner 21.3 x 18.5 x 17.6 (541 x 470 x 447)				

KOHLER®

Command PRO®


CH940, CH980, CH1000

MAXIMUM POWER

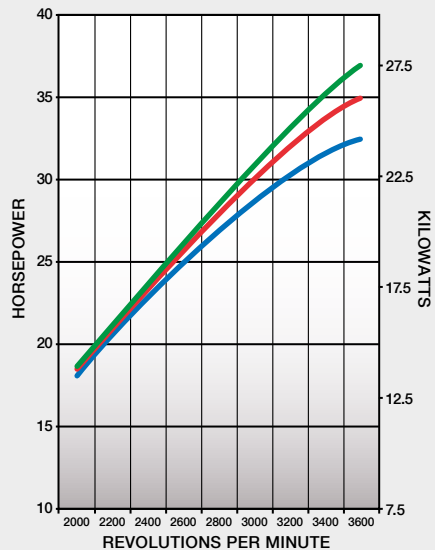

■ CH940 ■ CH980 ■ CH1000

MAXIMUM TORQUE

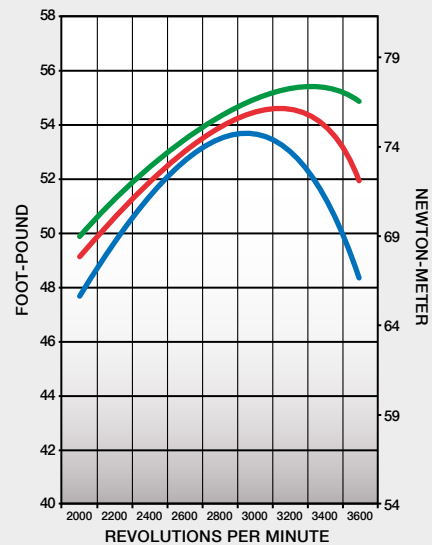

■ CH940 ■ CH980 ■ CH1000

KOHLER Command PRO®

32.5-37 hp



KOHLER® Command PRO 37 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features:

Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor; hydraulic valve lifters



MODEL		CH940	CH980	CH1000
Gross Power @ 3600 rpm	Max. hp (kW)	32.5 (24.2)	35 (26)	37 (27.5)
Displacement	cu in (cc)	61 (999)		
Bore	in (mm)	3.5 (90)		
Stroke	in (mm)	3.1 (78.5)		
Peak Torque @ rpm	ft-lb (Nm)	53.5 (72.5) @ 2800 rpm	54.5 (73.9) @ 3200 rpm	55.3 (75.0) @ 3400 rpm
Compression Ratio		8.8:1		
Dry Weight	lb (kg)	132 (59)		
Oil Capacity	U.S. qt (L)	2.9 (2.75)		
Lubrication		Full-pressure lubrication with full-flow filter		
*Dimensions L x W x H	in (mm)	15.3 (388) x 19 (484) x 27.5 (699)		

*Length is front to rear of engine. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

KOHLER®

Command PRO®

CV940, CV980, CV1000

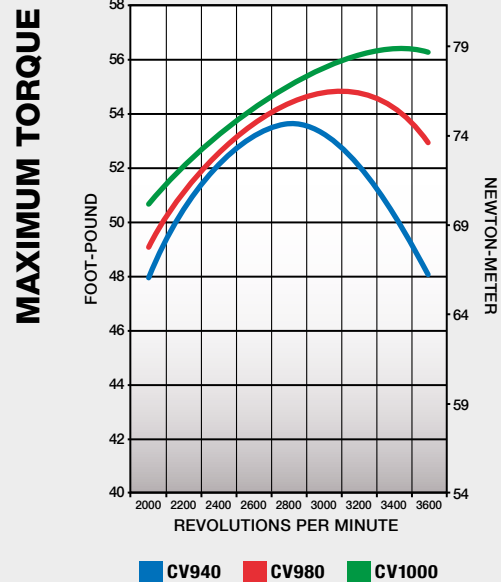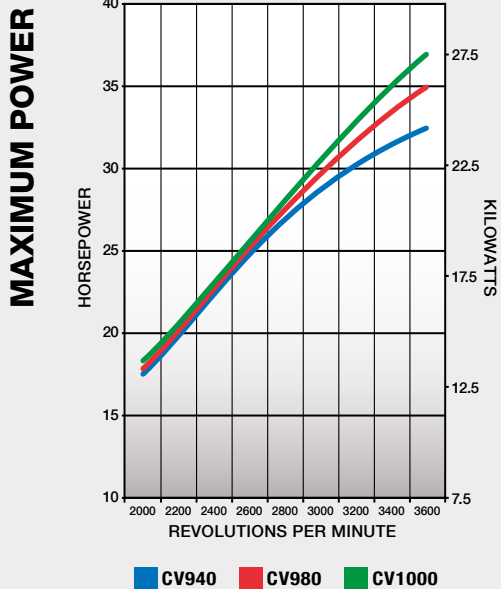

KOHLER Command PRO[®]

32.5-37 hp



KOHLER[®] Command PRO 37 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features:

Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor; hydraulic valve lifters

MODEL		CV940	CV980	CV1000
Gross Power @ 3600 rpm	Max. hp (kW)	32.5 (24.2)	35 (26)	37 (27.5)
Displacement	cu in (cc)	61 (999)		
Bore	in (mm)	3.5 (90)		
Stroke	in (mm)	3.1 (78.5)		
Peak Torque @ rpm	ft-lb (Nm)	53.6 (72.7) @ 2600 rpm	54.6 (74.0) @ 3000 rpm	56.3 (76.4) @ 3400 rpm
Compression Ratio		8.8:1		
Dry Weight	lb (kg)	127 (57)		
Oil Capacity	U.S. qt (L)	3.1 (2.9)		
Lubrication		Full-pressure lubrication with full-flow filter		
*Dimensions L x W x H	in (mm)	25.2 (640) x 19.0 (484) x 18.5 (470)		


*Length is blower housing to HD air cleaner. Width is valve cover to valve cover. Height is mounting surface to top of air cleaner.

KOHLER®

Command PRO®


CH620, CH640, CH682, CH732, CH742, CH752

MAXIMUM POWER

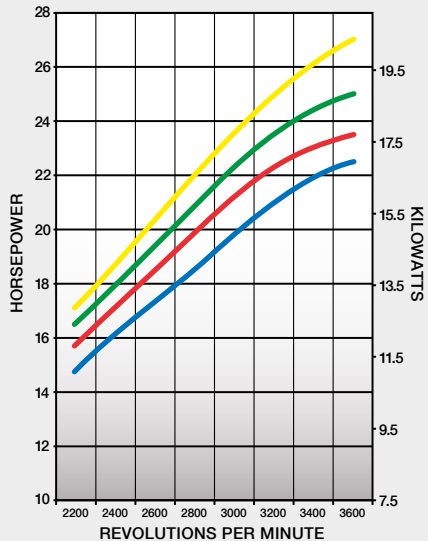

CH682 CH732
CH742 CH752

MAXIMUM TORQUE

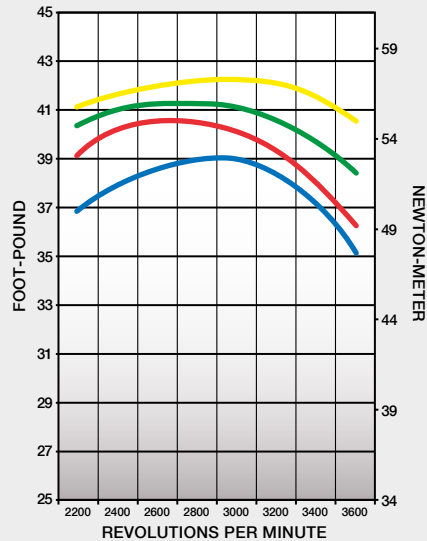

CH682 CH732
CH742 CH752

KOHLER Command PRO®

19-27 hp



KOHLER® Command PRO 25 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features:

Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor (only CH682, CH732, CH742, CH752); hydraulic valve lifters; heavy-duty air cleaner



MODEL		CH620	CH640	CH682	CH732	CH742	CH752
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
Displacement	cu in (cc)	41.1 (674)		42.4 (694)	45.6 (747)		
Bore	in (mm)	3.1 (80)			3.3 (83)		
Stroke	in (mm)	2.6 (67)		2.7 (69)			
Peak Torque @ rpm	ft-lb (Nm)	35.0 (47.5) @ 2400 rpm	35.7 (48.4) @ 2400 rpm	38.9 (52.7) @ 3000 rpm	40.4 (54.8) @ 2600 rpm	41.2 (55.9) @ 2600 rpm	42.2 (57.2) @ 3000 rpm
Compression Ratio		8.5:1		8.7:1	9.1:1		
Dry Weight	lb (kg)	90 (41)		105 (48)			
Oil Capacity	U.S. qt (L)	2.0 (1.9)					
Lubrication		Full-pressure lubrication with full-flow filter					
*Dimensions L x W x H	in (mm)	CH620-640: 14 (355) x 17.7 (451) x 26.5 (672) CH682-752: 14.6 (371) x 17.7 (451) x 24.5 (622)					

KOHLER®


Command PRO®

CH620, CH640, CH680, CH730, CH740, CH750

MAXIMUM POWER

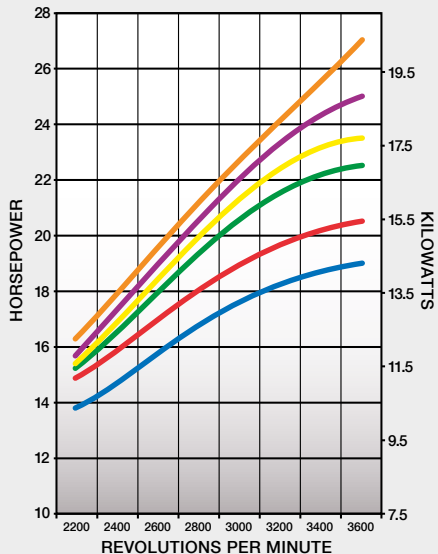

MAXIMUM TORQUE

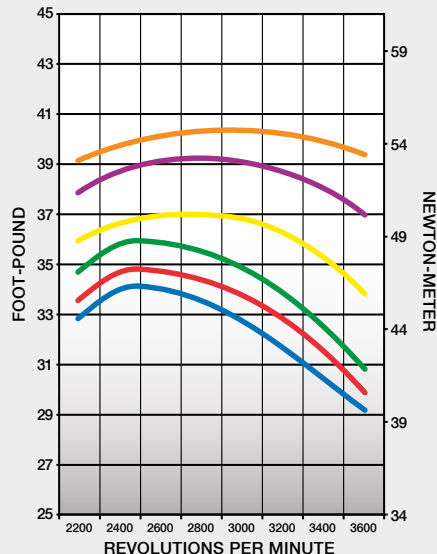

KOHLER Command PRO[®]

19-27 hp



KOHLER[®] Command PRO 27 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features:

Large-capacity air, fuel and oil filters; high-performance spark plugs; two-barrel carburetor (CH750); hydraulic valve lifters


MODEL		CH620	CH640	CH680	CH730	CH740	CH750
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
Displacement	cu in (cc)	41.1 (674)			44.2 (725)		45.6 (747)
Bore	in (mm)	3.1 (80)			3.3 (83)		
Stroke	in (mm)	2.6 (67)					2.7 (69)
Peak Torque @ rpm	ft-lb (Nm)	35.0 (47.5) @ 2400 rpm	35.7 (48.4) @ 2400 rpm	36.8 (49.9) @ 2800 rpm	38.4 (52.1) @ 2800 rpm	39.2 (53.1) @ 3000 rpm	41.2 (55.9) @ 3200 rpm
Compression Ratio		8.5:1			9.0:1		9.4:1
Dry Weight	lb (kg)	90 (41)			90 (41)		105 (48)
Oil Capacity	U.S. qt (L)	2.0 (1.9)					
Lubrication		Full-pressure lubrication with full-flow filter					
*Dimensions L x W x H	in (mm)	CH620 - 740: 14 (355) x 17.7 (421) x 19 (483) CH750: 14 (355) x 17.7 (451) x 22.4 (568)					

*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.


KOHLER®

Command PRO®

CV620, CV640, CV682, CV732, CV742, CV752

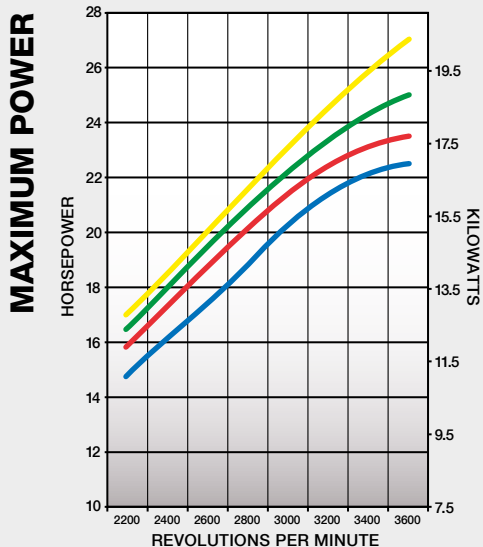

CV682 CV732
CV742 CV752

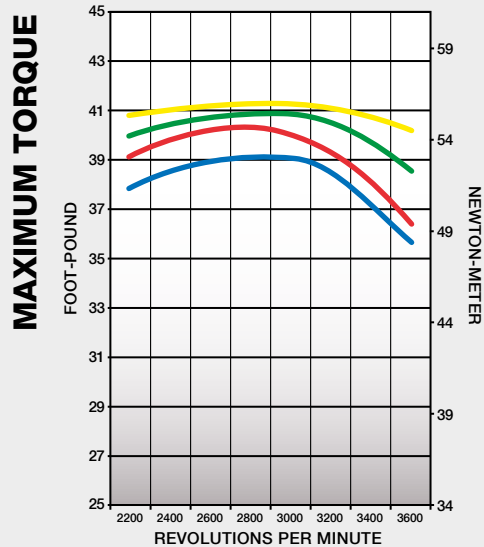

CV682 CV732
CV742 CV752

KOHLER Command PRO®

19-27 hp



KOHLER® Command PRO 23.5 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block

Additional Features:


Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters two-barrel carburetor on only CV682, CV732, CV742, CV752 and heavy-duty air cleaner

MODEL		CV620	CV640	CV682	CV732	CV742	CV752
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
Displacement	cu in (cc)	41.1 (674)		42.4 (694)	45.6 (747)		
Bore	in (mm)	3.1 (80)			3.3 (83)		
Stroke	in (mm)	2.6 (67)		2.7 (69)			
Peak Torque @ rpm	ft-lb (Nm)	34.0 (46.1) @ 2400 rpm	34.7 (47.0) @ 2400 rpm	39.0 (52.9) @ 2800 rpm	40.3 (54.6) @ 2800 rpm	40.8 (55.3) @ 3000 rpm	41.2(55.9) @ 3000 rpm
Compression Ratio		8.5:1		8.7:1	9.1:1		
Dry Weight	lb (kg)	90 (41)		105 (48)			
Oil Capacity	U.S. qt (L)	2.0 (1.9)					
Lubrication		Full-pressure lubrication with full-flow filter					
*Dimensions L x W x H	in (mm)	CV620 - 640: 20.5 (521) x 17.7 (451) x 22.5 (572) CV682 - 752: 20.5 (521) x 16.2 (413) x 19.9 (506)					


*Length is blower housing to air cleaner cover. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting surface.

KOHLER® Command PRO®

CV620, CV640, CV680, CV730, CV740, CV750

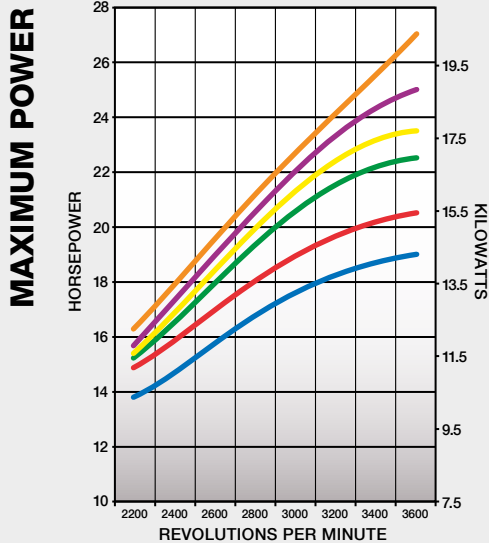

■ CV620 ■ CV640 ■ CV680
■ CV730 ■ CV740 ■ CV750

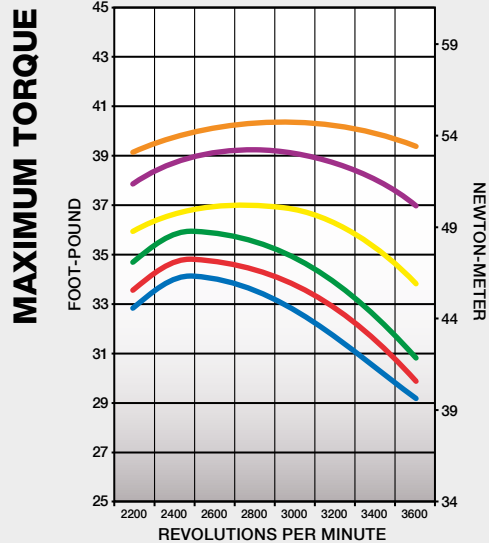

■ CV620 ■ CV640 ■ CV680
■ CV730 ■ CV740 ■ CV750

KOHLER Command PRO[®]

19-27 hp



KOHLER[®] Command PRO 22.5 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 3-Yr Commercial

Engine Type:
Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features:
Large-capacity air, fuel and oil filters; high-performance spark plugs; hydraulic valve lifters



MODEL		CV620	CV640	CV680	CV730	CV740	CV750
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	20.5 (15.3)	22.5 (16.8)	23.5 (17.5)	25 (18.6)	27 (20.1)
Displacement	cu in (cc)	41.1 (674)			44.2 (725)		45.6 (747)
Bore	in (mm)	3.1 (80)			3.3 (83)		
Stroke	in (mm)	2.6 (67)					2.7 (69)
Peak Torque @ rpm	ft-lb (Nm)	34.0 (46.1) @ 2400 rpm	34.7 (47.0) @ 2400 rpm	35.8 (48.5) @ 2400 rpm	36.9 (50.0) @ 2800 rpm	39.2 (53.1) @ 2800 rpm	40.3 (54.6) @ 3000 rpm
Compression Ratio		8.5:1			9.0:1		9.4:1
Dry Weight	lb (kg)	90 (41)			94 (43)		105 (48)
Oil Capacity	U.S. qt (L)	2.0 (1.9)					
Lubrication		Full-pressure lubrication with full-flow filter					
*Dimensions L x W x H	in (mm)	17.8 (452) x 17.7 (451) x 14.1 (358)					

KOHLER®

Command PRO®

Closed-Loop Propane EFI

PCH680, PCH740

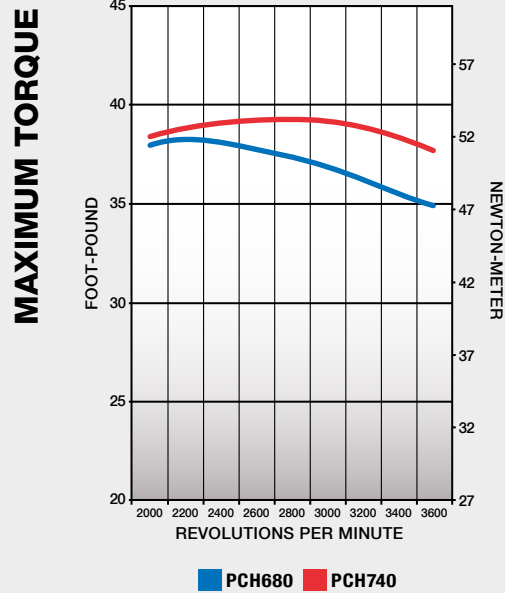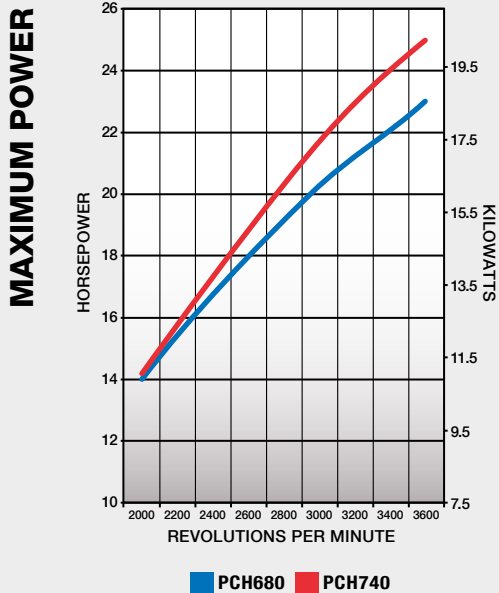

KOHLER Command PRO[®]
Closed-Loop
Propane EFI

23-25 hp



KOHLER[®] Command PRO
Closed-Loop Propane EFI 25 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:
Closed-loop propane EFI, four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features:
Engine-mounted ECU and fuel pressure regulator, large-capacity air and oil filters, hydraulic valve lifters

MODEL		PCH680	PCH740
Shaft Orientation		Horizontal	
Gross Power @ 3600 rpm	Max. hp (kW)	23 (17.1)	25 (18.6)
Displacement	cu in (cc)	45 (747)	
Bore	in (mm)	3.3 (83)	
Stroke	in (mm)	2.7 (69)	
Peak Torque @ rpm	ft-lb (Nm)	38.0 (51.5) @ 2200 rpm	39.0 (52.8) @ 2800 rpm
Compression Ratio		9.1	
Dry Weight	lb (kg)	108 (49)	
Oil Capacity	U.S. qt (L)	2 (1.9)	
Lubrication		Full-pressure lubrication with full-flow filter	
*Dimensions L x W x H	in (mm)	Horizontal shaft flat air cleaner 14.6 x 18.2 x 18.7 (371 x 462 x 475) Horizontal shaft heavy-duty air cleaner 14.8 x 18.9 x 24.5 (376 x 480 x 622)	



*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

KOHLER®

Command PRO®

Closed-Loop Propane EFI

PCV680, PCV740

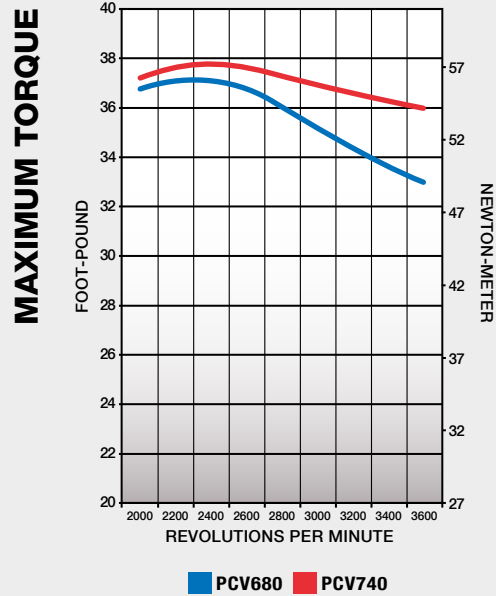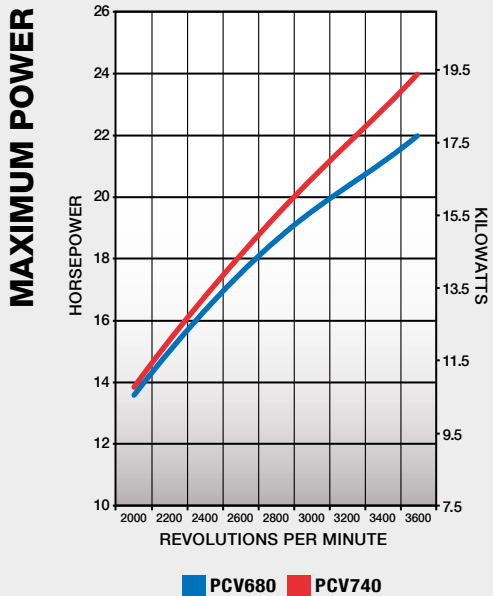

KOHLER Command PRO_®
Closed-Loop
Propane EFI

22-24 hp



KOHLER_® Command PRO
Closed-Loop Propane EFI 24 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 3-Yr Commercial

Engine Type:
Closed-loop propane EFI, four-cycle, OHV, cast-iron cylinder liners, aluminum block
Additional Features:
Engine-mounted ECU and fuel pressure regulator, large-capacity air and oil filters, hydraulic valve lifters


MODEL		PCV680	PCV740
Shaft Orientation		Vertical	
Gross Power @ 3600 rpm	Max. hp (kW)	22 (16.4)	24 (17.0)
Displacement	cu in (cc)	45 (747)	
Bore	in (mm)	3.3 (83)	
Stroke	in (mm)	2.7 (69)	
Peak Torque @ rpm	ft-lb (Nm)	36.7 (49.8) @ 2200 rpm	37.3 (50.6) @ 2400 rpm
Compression Ratio		9.1	
Dry Weight	lb (kg)	108 (49)	
Oil Capacity	U.S. qt (L)	2 (1.9)	
Lubrication		Full-pressure lubrication with full-flow filter	
*Dimensions L x W x H		Vertical shaft heavy-duty air cleaner 21.3 x 18.5 x 17.6 (541 x 470 x 447)	

*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.


KOHLER®

Command PRO® Carbureted Propane and Natural Gas

CH730LP, CH740 LP/NG

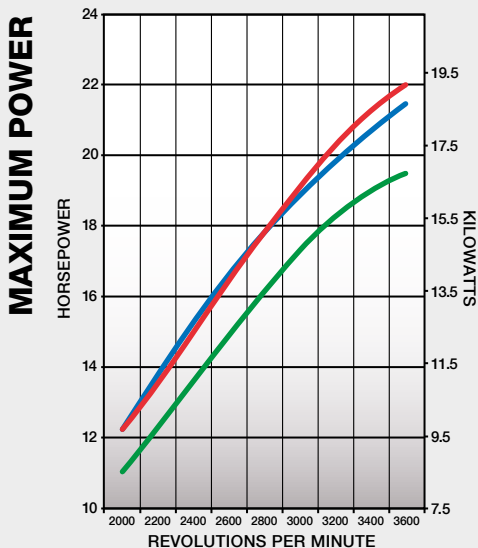

■ CH730LP ■ CH740 LP/NG (on LP)
■ CH740 LP/NG (on NG)

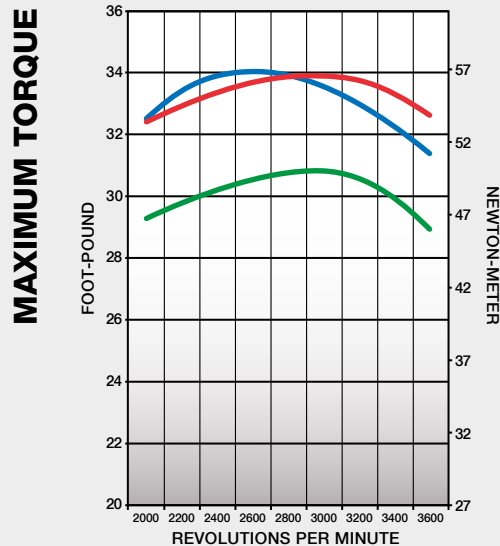

■ CH730LP ■ CH740 LP/NG (on LP)
■ CH740 LP/NG (on NG)

KOHLER Command PRO[®]
Carbureted Propane
and Natural Gas

19.5-22 hp



KOHLER Command PRO[®]
Carbureted Propane 21.5 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:

Carbureted propane (CH730LP) and propane/natural gas (CH740 LP/NG),
Four-cycle, OHV, cast-iron cylinder liners, aluminum block

Additional Features:

Large-capacity air and oil filters; high-performance spark plugs; hydraulic valve lifters

MODEL		CH730LP		CH740LP/NG	
				LP	LP
Fuel		LP		LP	NG
Gross Power @ 3600 rpm	Max. hp (kW)	21.5 (16.0)		22.0 (16.4)	19.5 (14.5)
Displacement	cu in (cc)	44 (725)			
Bore	in (mm)	3.3 (83)			
Stroke	in (mm)	2.6 (67)			
Peak Torque @ rpm	ft-lb (Nm)	34.0 (46.1) @ 2600 rpm	33.9 (46) @ 3000 rpm	30.8 (41.8) @ 3000 rpm	
Compression Ratio		9.0			
Dry Weight	lb (kg)	108 (49)		94 (43)	
Oil Capacity	U.S. qt (L)	2 (1.9)			
Lubrication		Full-pressure lubrication with full-flow filter			
*Dimensions L x W x H	in (mm)	14.0 x 17.7 x 19.0 (356 x 450 x 483)			

*Length is grass screen to PTO mounting face. Width is spark plug to spark plug. Height is top of air cleaner cover to mounting feet.

KOHLER[®]

Aegis[®]

LH690, LH775

KOHLER® Aegis®

24-30 hp



KOHLER® Aegis 24 hp

Cooling: Liquid
Cylinders: V-Twin
Shaft: Horizontal
Warranty: 3-Yr Commercial

Engine Type:
Four-cycle, gasoline, OHV, cast-iron cylinder liners, aluminum block
Additional Features:
Automotive-style radiator, heavy-duty air filter, hydraulic valve lifters

MODEL		LH690	*LH775
Gross Power @ 3600 rpm	Max. hp (kW)	24 (17.9)	30 (22.3)
Displacement	cu in (cc)	41.1 (674)	45.6 (747)
Bore	in (mm)	3.2 (80)	3.3 (83)
Stroke	in (mm)	2.6 (67)	2.7 (69)
Peak Torque @ rpm	ft-lb (Nm)	42.9 (58.1) @ 2400 rpm	44.6 (60.5) @ 3400 rpm
Compression Ratio		8.5:1	8.7:1
**Dry Weight	lb (kg)	114 (51.7)	116 (52.6)
Oil Capacity	U.S. qt (L)	2 (1.9)	
Lubrication		Full-pressure lubrication with full-flow filter	
***Dimensions L x W x H	in (mm)	17 x 18.1 x 26.5 (432 x 460 x 673)	


*Electronic fuel injection.

**Weight with oil and coolant: LH690 = 125.4 (56.9); LH775 = 127.4 (57.8).


***Length is radiator to closure plate. Width is radiator from side to side. Height is mounting feet to rain cap.

KOHLER® Command PRO®

CH260, CH270, CH395, CH440

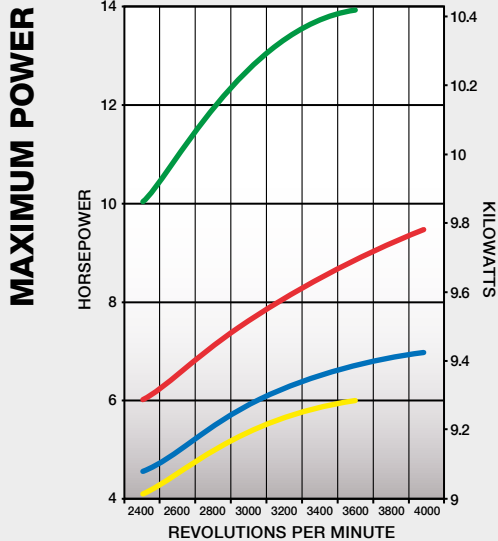

■ CH260 ■ CH270
■ CH395 ■ CH440

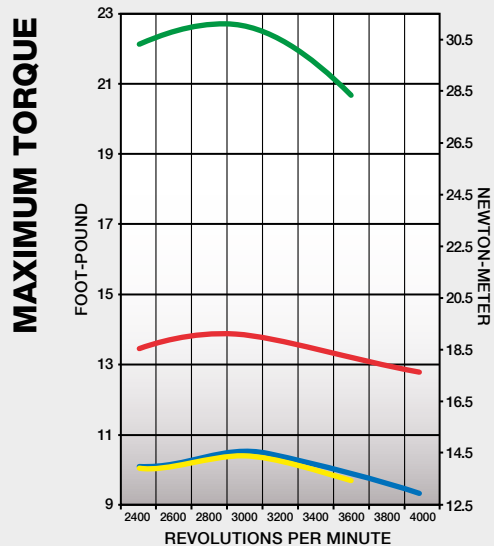

■ CH260 ■ CH270
■ CH395 ■ CH440

KOHLER Command PRO®

7-14 hp



KOHLER® Command PRO 7 hp

Cooling: Air

Cylinders: Single

Shaft: Horizontal

Warranty: 3-Yr Commercial

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum head and crankcase

Additional Features:


Quad-Clean™ four-stage cyclonic air cleaner, dual ball bearings, large metal fuel tank

MODEL		CH260	CH270	CH395	CH440
Gross Power @ rpm	Max. hp (kW)	6 (4.5) @ 4000 rpm	7 (5.2) @ 4000 rpm	9.5 (7.1) @ 4000 rpm	14 (10.5) @ 3600 rpm
Displacement	cu in (cc)	12.7 (208)	12.7 (208)	16.9 (277)	26.2 (429)
Bore	in (mm)	2.8 (70)	2.8 (70)	3.1 (78)	3.5 (89)
Stroke	in (mm)	2.1 (54)	2.1 (54)	2.3 (58)	2.7 (69)
Peak Torque @ rpm	ft-lb (Nm)	10.4 (14.1) @ 3000 rpm	10.5 (14.2) @ 3000 rpm	13.9 (18.8) @ 2800 rpm	22.7 (30.8) @ 2800 rpm
Compression Ratio		8:5:1	8.5:1		
Dry Weight	lb (kg)	38.7 (17.5)	38.7 (17.5)	61.5 (27.9)	72.8 (33.0)
Oil Capacity	U.S. qt (L)	0.6 (0.6)	0.6 (0.6)	1.4 (1.3)	
Fuel Capacity	U.S. qt (L)	4.2 (4.0)	4.2 (4.0)	7.4 (7.0)	
Lubrication		Splash			
*Dimensions L x W x H	in (mm)	12.7 X 15.2 X 14.2 (322 X 385 X 361)	12.7 x 15.2 x 14.2 (322 x 385 x 361)	15.9 x 16.8 x 16.2 (403 x 428 x 424)	16.2 x 17.8 x 17.4 (411 x 452 x 442.5)


KOHLER®

Confidant™

ZT710, ZT720, ZT730, ZT740

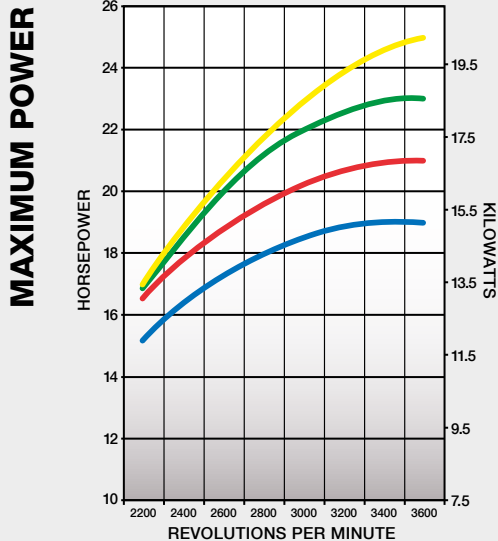

■ ZT710 ■ ZT720
■ ZT730 ■ ZT740

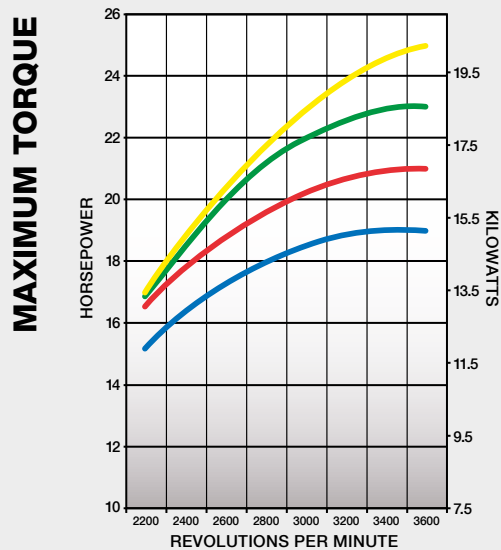

■ ZT710 ■ ZT720
■ ZT730 ■ ZT740

KOHLER® Confidant™

19-25 hp



KOHLER® Confidant 21 hp

Cooling: Air
Cylinders: V-Twin
Shaft: Vertical
Warranty: 2-Yr Commercial
3-Yr Consumer

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder bores, aluminum block

Additional Features:



Consistent Cut™ technology for more consistent power; PRO performance air, oil and fuel filters; high-impact nylon shroud; optional chopper grass screen; optional cyclonic or Quad-Clean™ air filter, recoil-start option for wide-area walk-behind and stand-on mowers

MODEL		ZT710	ZT720	ZT730	ZT740
Gross Power @ 3600 rpm	Max. hp (kW)	19 (14.2)	21 (15.7)	23 (17.2)	25 (18.6)
Displacement	cu in (cc)	44 (725)		46 (747)	
Bore	in (mm)	3.3 (83)			
Stroke	in (mm)	2.6 (67)		2.7 (69)	
Peak Torque @ rpm	ft-lb (Nm)	40.0 (54.2) @ 2200 rpm	40.7 (55.2) @ 2200 rpm	42.1 (57.1) @ 2400 rpm	42.4 (57.5) @ 2400 rpm
Compression Ratio		9:01:01			
Dry Weight	lb (kg)	91 (41.3)			
Oil Capacity	U.S. qt (L)	2 (1.9)			
Lubrication		Pressure lubrication with full-flow filter			
*Dimensions L x W x H	in (mm)	Standard: 18.8 x 17.5 x 14.9 (478 x 443 x 378) With cyclonic filter: 18.8 x 17.5 x 17.0 (478 x 443 x 431)			

*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.

KOHLER® 3000 Series

SH255, SH265

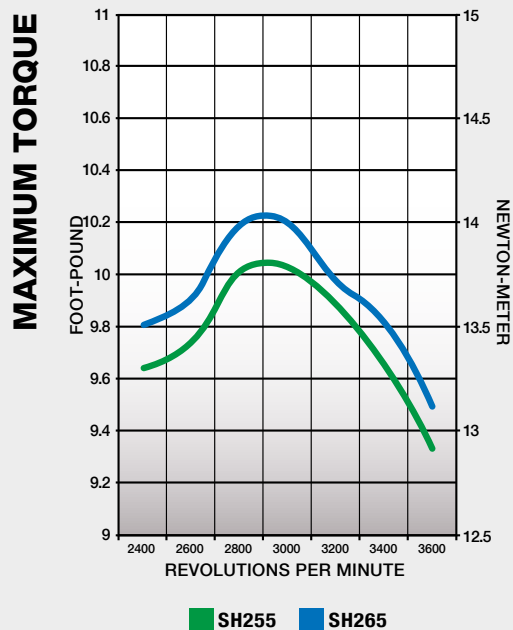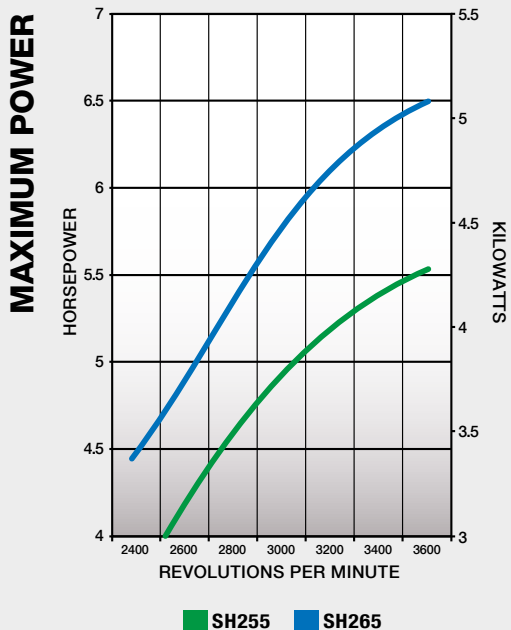

KOHLER® 3000 Series

5.5-6.5 hp



KOHLER® 3000 Series 6.5 hp

Cooling: Air

Cylinders: Single

Shaft: Horizontal

Warranty: 2-Yr Consumer

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder liner, aluminum block

Additional Features:


Dual oil fills and drains, dual-element air cleaner, large metal fuel tank

MODEL		SH255	SH265
Gross Power @ 3600 rpm	Max. hp (kW)	5.5 (4.2)	6.5 (4.8)
Displacement	cu in (cc)	12 (196)	12 (196)
Bore	in (mm)	2.7 (68)	2.7 (68)
Stroke	in (mm)	2.1 (54)	2.1 (54)
Peak Torque @ rpm	ft-lb (Nm)	10.0 (13.6) @ 3600 rpm	10.2 (13.8) @ 3000 rpm
Compression Ratio		8.5:1	8.5:1
Dry Weight	lb (kg)	35.3 (16)	35.3 (16)
Oil Capacity	U.S. qt (L)	.63 (.6)	.63 (.6)
Fuel Capacity	U.S. qt (L)	3.4 (3.3)	3.4 (3.3)
Lubrication		Splash	Splash
*Dimensions L x W x H	in (mm)	12.5 x 14.4 x 13.5 (319 x 366 x 343)	12.5 x 14.4 x 13.5 (319 x 366 x 343)

KOHLER® 7000 Series


KT715, KT725, KT730, KT735, KT740, KT745

MAXIMUM POWER

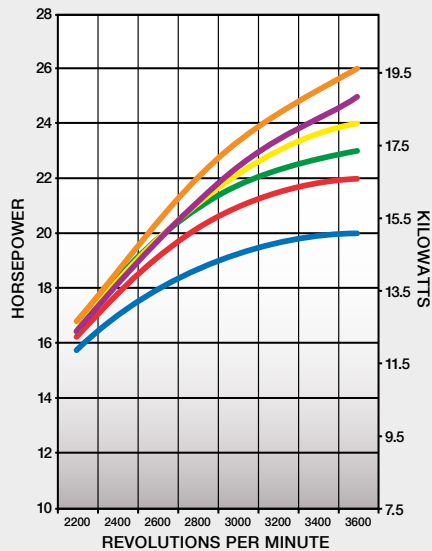

■ KT715 ■ KT725 ■ KT730
■ KT735 ■ KT740 ■ KT745

MAXIMUM TORQUE

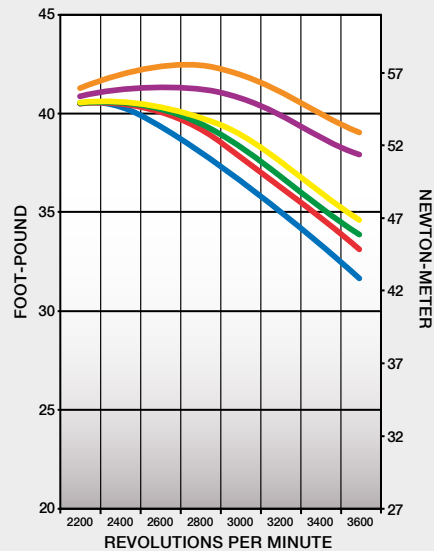

■ KT715 ■ KT725 ■ KT730
■ KT735 ■ KT740 ■ KT745

KOHLER® 7000 Series

20-26 hp



KOHLER® 7000 Series 26 hp

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder bore, aluminum block

Cooling: Air

Cylinders: V-Twin

Shaft: Vertical

Warranty: 2-Yr Consumer

Additional Features:



Cast-iron cylinder bores, pressure lubrication, Consistent-Cut™ technology for more consistent power, dual-sealed air filter, optional PRO performance filtration and platinum spark plug

MODEL		KT715	KT725	KT730	KT735	KT740	KT745
Gross Power @ 3600 rpm	Max. hp (kW)	20 (14.9)	22 (16.2)	23 (17.2)	24 (17.9)	25 (18.6)	26 (19.4)
Displacement	cu in (cc)	44 (725)					45 (747)
Bore	in (mm)	3.3 (83)					
Stroke	in (mm)	2.6 (67)					2.7 (69)
Peak Torque @ rpm	ft-lb (Nm)	40.3 (54.6) @ 2200 rpm	40.4 (54.8) @ 2200 rpm	40.5 (54.9) @ 2200 rpm	40.5 (54.9) @ 2400 rpm	41.3 (56.0) @ 2600 rpm	42.4 (57.5) @ 2600 rpm
Compression Ratio		9:1:1					
Dry Weight	lb (kg)	85 (38.6)					
Oil Capacity	U.S. qt (L)	2 (1.9)					
Lubrication		Pressure lubrication with full-flow filter					
*Dimensions L x W x H	in (mm)	Standard: 18.6 x 17.5 x 13.4 (473 x 445 x 341) With PRO performance filtration: 18.6 x 17.5 x 13.9 (473 x 445 x 354)					

*Length is front of air cleaner cover to back of blower housing. Width is side to side. Height is mounting surface to grass screen.

KOHLER® Courage®

SV471, SV530, SV541, SV591, SV601

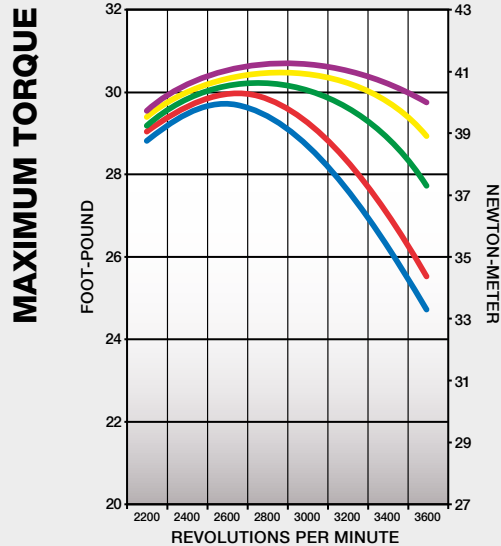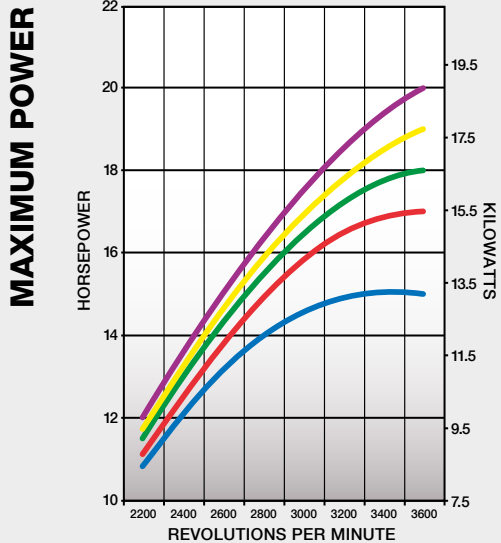

KOHLER® Courage®

15-20 hp



KOHLER® Courage 20 hp

Cooling: Air
Cylinders: Single
Shaft: Vertical
Warranty: 2-Yr Consumer

Engine Type:

Four-cycle, gasoline, OHV, cast-iron cylinder bore, aluminum block


Additional Features:

Twin-cam, dual-reciprocating balance system, Consistent-Cut™ technology, acoustically dampened air induction, leakproof crankcase, crossflow cylinder head


MODEL		SV471	SV530	SV541	SV591	SV601
Gross Power @ 3600 rpm	Max. hp (kW)	15 (11.2)	17 (12.7)	18 (13.4)	19 (14.2)	20 (14.9)
Displacement	cu in (cc)	36 (597)				
Bore	in (mm)	3.7 (94)				
Stroke	in (mm)	3.4 (86)				
Peak Torque @ rpm	ft-lb (Nm)	29.7 (40.3) @ 2600 rpm	30.0 (40.7) @ 2600 rpm	30.2 (40.9) @ 2600 rpm	30.4 (41.2) @ 2800 rpm	30.6 (41.5) @ 3000 rpm
Compression Ratio		8.5:1				
Dry Weight	lb (kg)	79 (35.8)				
Oil Capacity	U.S. qt (L)	1.6 (1.5)				
Lubrication		Pressure lubrication with full-flow filter				
*Dimensions L x W x H	in (mm)	19.4 x 16.4 x 12.9 (493 x 417 x 328)				

KOHLER® 2000 Series

RH255, RH265

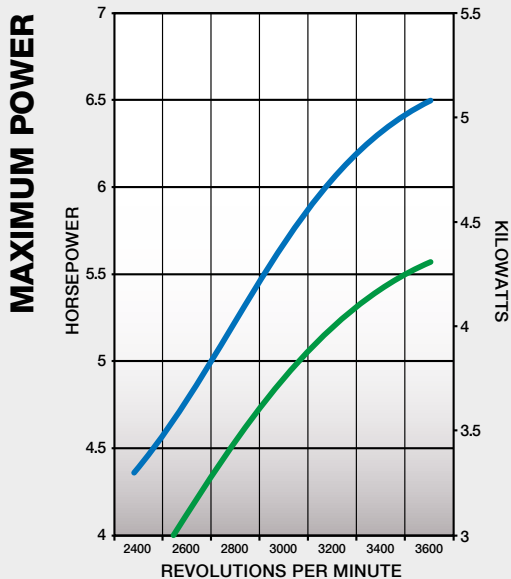

■ RH255 ■ RH265

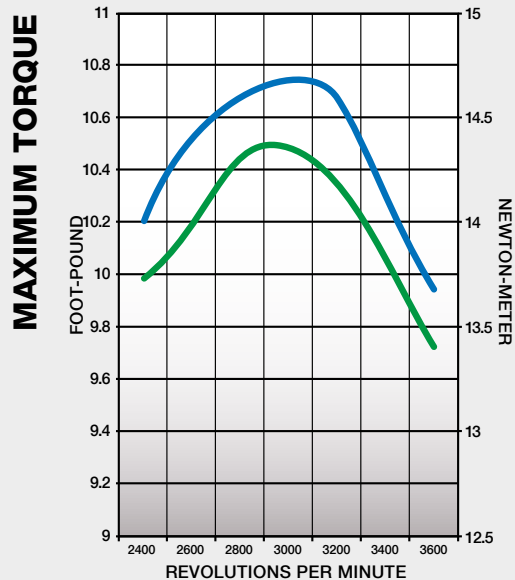

■ RH255 ■ RH265

KOHLER® 2000 Series

5.5-6.5 hp



KOHLER® 2000 Series 6.5 hp


Cooling: Air
Cylinders: Single
Shaft: Horizontal
Warranty: 2-Yr Consumer

Engine Type:
Four-cycle, gasoline, OHV
Additional Features:
Accu-Fill® fuel tank, single-lever controls, lightweight and compact

MODEL		RH255	RH265
Gross Power @ 3600 rpm	Max. hp (kW)	5.5 (4.2)	6.5 (4.8)
Displacement	cu in (cc)	12 (196)	12 (196)
Bore	in (mm)	2.7 (68)	2.7 (68)
Stroke	in (mm)	2.1 (54)	2.1 (54)
Peak Torque @ rpm	ft-lb (Nm)	10.5 (14.2) @ 3600 rpm	10.7 (14.5) @ 3600 rpm
Compression Ratio		8.5:1	8.5:1
Dry Weight	lb (kg)	28.8 (13)	28.8 (13)
Oil Capacity	U.S. qt (L)	.63 (.6)	.63 (.6)
Fuel Capacity	U.S. qt (L)	2.0 (2.1)	2.0 (2.1)
Lubrication		Splash	Splash
*Dimensions L x W x H	in (mm)	12.2 x 14.0 x 13 (311 x 356 x 330)	12.2 x 14.0 x 13 (311 x 356 x 330)

KOHLER® XT Series

XT650, XT675, XT775

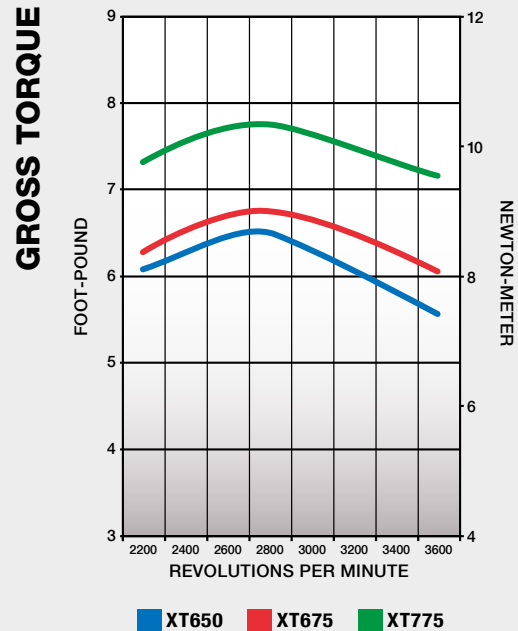

KOHLER® XT Series

6.5-7.75 ft-lb Gross Torque



KOHLER® XT675

Engine Type:

Four-cycle, air-cooled, gasoline, OHV, cast-iron cylinder bore, aluminum block

Cooling: Air

Cylinders: Single

Shaft: Vertical

Warranty: 2-Yr Consumer

Additional Features:

Accu-Fill® easy-to-fill fuel tank; easy-pull, smooth, effortless starting; Consistent-Cut™ technology for more consistent power; Smart-Choke™ easy, no-prime starting; and one-hand, no-tool air cleaner access for easy maintenance

MODEL		XT650	XT675	XT775
Gross Torque @ 2800 rpm	ft lb (Nm)	6.5 (8.8)	6.75 (9.2)	7.75 (10.5)
Displacement	cu in (cc)	9.1 (149)		10.6 (173)
Bore	in (mm)	2.6 (65)		2.7 (70)
Stroke	in (mm)	1.8 (45)		1.8 (45)
Compression Ratio		9.2:1		8.5:1
Dry Weight	lb (kg)	23.8 (10.8)		26.9 (12.2)
Lubrication		Splash		
Fuel Capacity	U.S. qt (L)	1.2 (1.1)		1.5 (1.4)
Oil Capacity	U.S. oz (L)	20 (.6)		
*Dimensions L x W x H	in (mm)	14.4 x 14.0 x 10.5 (366 x 356 x 267)		17.1 x 13.9 x 11.0 (434 x 353 x 278)

Note:

Note:

Note:

KOHLER®

Lombardini s.r.l. is a part of Kohler Group.
Lombardini has manufacturing facilities in Italy, Slovakia
and India and sales subsidiaries in France, Germany, UK,
Spain and Singapore.

Kohler/Lombardini reserves the right to make
modifications without prior notice.

www.lombardini.it

EUROPE

Lombardini Srl

Via Cav. del lavoro
A. Lombardini n° 2
42124 Reggio Emilia, ITALY
T. +39-(0)522-389-1
F. +39-(0)522-389-503

DEUTSCHLAND

Lombardini Motoren GmbH

Silostr. 41,
65929 FRANKFURT
Hessen, DEUTSCHLAND
T. +49-(0)69-9508160
F. +49-(0)69-5073410

UK

Lombardini U.K. Ltd

1, Rochester Barn - Eynsham Road
OX2 9NH
Oxford, UK
T. +44-(0)1865-863858
F. +44-(0)1865-861754

ESPAÑA

Lombardini ESPAÑA, S.L.

P.I. Cova Solera 1-9
08191 - Rubí (Barcelona)
ESPAÑA
T. +34-(0)9358-62111
F. +34-(0)9369-71613

FRANCE

Lombardini France S.a.s.

47 Allée de Riottier
69400 Limas, FRANCE
T. +33-(0)474-626500
F. +33-(0)474-623945

ROAPAC

Lombardini Singapore

26 Keong Saik Road (3rd floor)
Asia Pacific Represent. Offices
089154 - Singapore
T. +65-(0)622-50556
F. +65-(0)622-50551